

POROSITY DETECTOR CALIBRATION

Application

- Verification of output voltage and set voltage of detectors when a load is applied to the probe.
- To ensure accuracy, and to enable voltage adjustment (if necessary).

Features

- Used for checking & calibrating Porosity Detector output voltage
- Compact, lightweight hand-held unit
- Integral probe
- Conformance Certificate
- Carry Case (36 x 29 x 18)



DC Crest Meter

DC Crest Meter Specifications

Range: 0 to 30kV
Resolution: 10V (0 to 20kV)
100V (0 to 30kV)

Earth Lead: Separate


Dimensions: 260 x 85 x 50mm
Weight: 380g

Pulse Crest Meter Specifications

Range: 5 to 30kV
Resolution: 100V

Earth Lead: Integral

Dimensions: 300 x 75 x 40mm
Weight: 390g

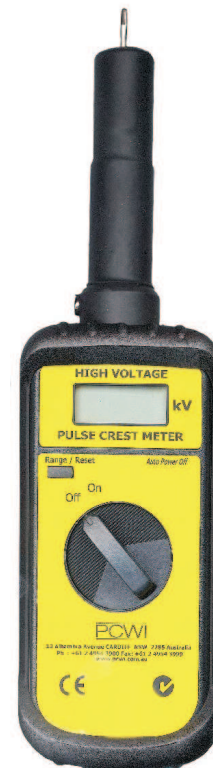

Pulse Crest Meter

(suitable for PCWI Pulse Detectors only)

Made in **AUSTRALIA**

Certification available
(Pulse Crest meter to 30kV only)

PCWI International Pty Ltd

13 Alhambra Avenue CARDIFF NSW 2285
Ph: (02) 4954 3900 • Fax: (02) 4954 3999

A0066lp